

## START FROM HERE

- Make sure power is completely off at the fuse box.
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area.
- Wear gloves at all times during this installation.
- Read instructions carefully before you start assembly.
- Keep this instruction sheet for future reference.

**Technical Support:** 1-855-855-8926

**Please Note:**


- For dimming, a TRIAC type of dimmer is required.

### (Octagon junction box install)


1. Remove the fixture from its original packaging. Next, remove the mounting plate (1c) from the canopy (2b) by removing the screws (2a). Install a backplate (1e) to the mounting plate (1c) with screws (1f) provided in hardware package. Secure the universal mounting plate (1g) and mounting plate (1c) with backplate to the electrical junction box (1a) with screws (1d) provided in the hardware package.
2. You are now ready to mount the canopy to the mounting bar. First connect all wires (1b) correctly black to black "L", white to white "N" and the ground wire with provided marrettes from the hardware package. Attach the canopy (2b) to mounting plate (1c) and secure with screws (2a)
3. You have now completed the installation of your fixture, enjoy.

### (Single gang box install)

1. Remove the fixture from its original packaging. Next, remove the mounting plate (1c) from the canopy (2b) by removing the screws (2a). Secure the mounting plate (1c) to the electrical junction box (1a) with screws (1d) provided in the hardware package.
2. You are now ready to mount the canopy to the mounting bar. First connect all wires (1b) correctly black to black "L", white to white "N" and the ground wire with provided marrettes from the hardware package. Attach the canopy (2b) to mounting plate (1c) and secure with screws (2a)
3. You have now completed the installation of your fixture, enjoy.

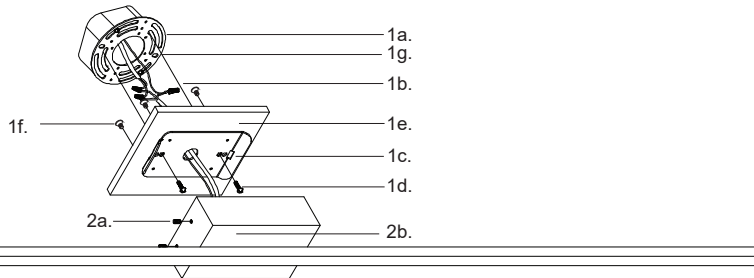

(Octagon junction box install)

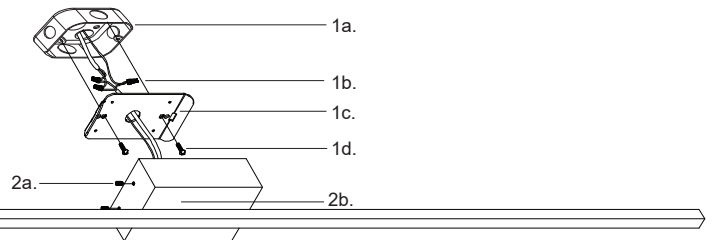

(Single gang box install)